

Lo-Vo - DMX1202XE Power Driver

Power Drivers are the power and control center of Springtree's Lo-Vo Architectural Lighting System.

The DMX1202XE features eight 150Watt Ports and connects to Lo-Vo lighting fixtures via low-voltage cable.

The DMX1202XE is rack-mountable.



SKU: DMX1202XE

Operating Modes:

- 2 DMX Modes
- On Board Stand-Alone Operation

Power

- AC Input: 120V
- DC Output: 150w per connector, 1200w total

Dimension and Weight

- Dimensions: 19" x 14.5" x 3.5"
- Weight: 20 lbs


Certifications

- ETL




Connections

- 3-Pin DMX
- Locking Power Connector (Edison to Locking Power Connector Cable Included)
- Phoenix Connectors (included) are used to connect the DMX1202XE to Lo-Vo Lighting Fixtures via 18/5 low-voltage cable.

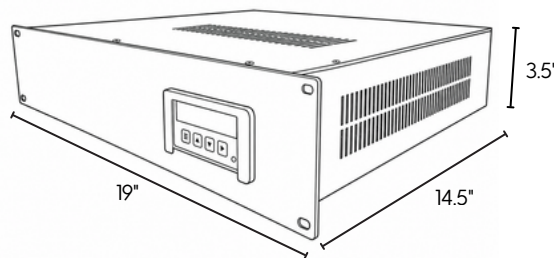

[Scan for Product Page]

Zone Options

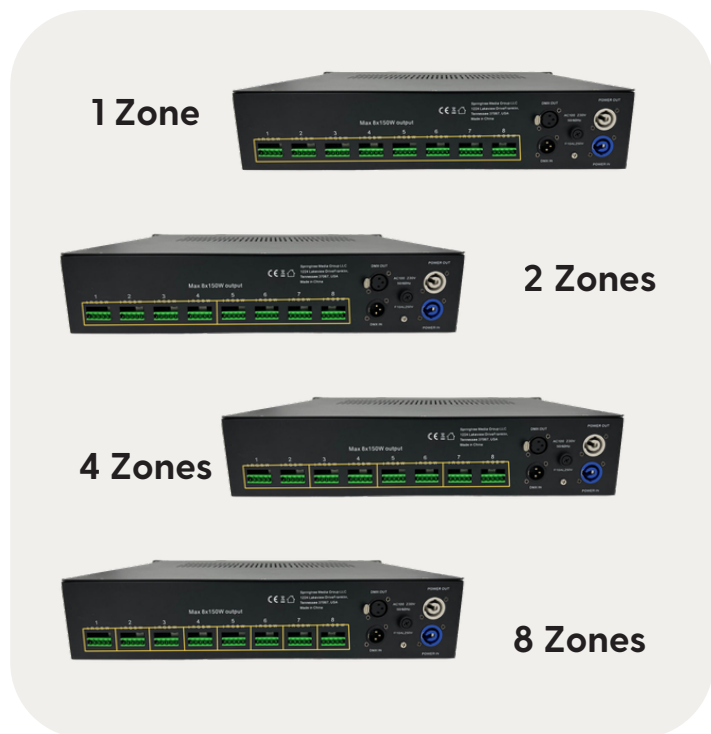

The DMX1202XE gives you four flexible options for DMX zone control. Run all eight ports together, split them into two zones of four ports each, four zones of two ports each, or control each port independently.

DMX Traits

RGBW Mode

CH 1	Red
CH 2	Green
CH 3	Blue
CH 4	Warm White
CH 5	Dimmer

The DMX1202XE can be set to RGBW Mode with 5 channels per zone, or White Mode with a single channel per zone.

White Mode

CH 1	Dimmer
-------------	--------

Units Powered

	DMX150	DMX602XE	DMX1202XE	DMX1802XE
30Watt Spatial Flats	4	16	32	48
50Watt Spatial Flats	3	12	24	28
50Watt Spatial Flat Pendants	3	12	24	28
LED Spatial Tape	49 feet	196 feet	392 feet	459 feet
LED Spatial Bars	1	4	8	12
WW Spatial Minis	15	64	128	156
RGBWW Spatial Minis	12	48	96	120
30Watt Round LED Board	4	16	32	48
50Watt Round LED Board	3	12	24	28
12Watt LED Board	12	48	96	120



[Scan to learn more about
Power Drivers]