


PAR12X12L / PAR12X8L -[WH]

INDOOR LITE SERIES PAR

EVENT
LIGHTING **lite**

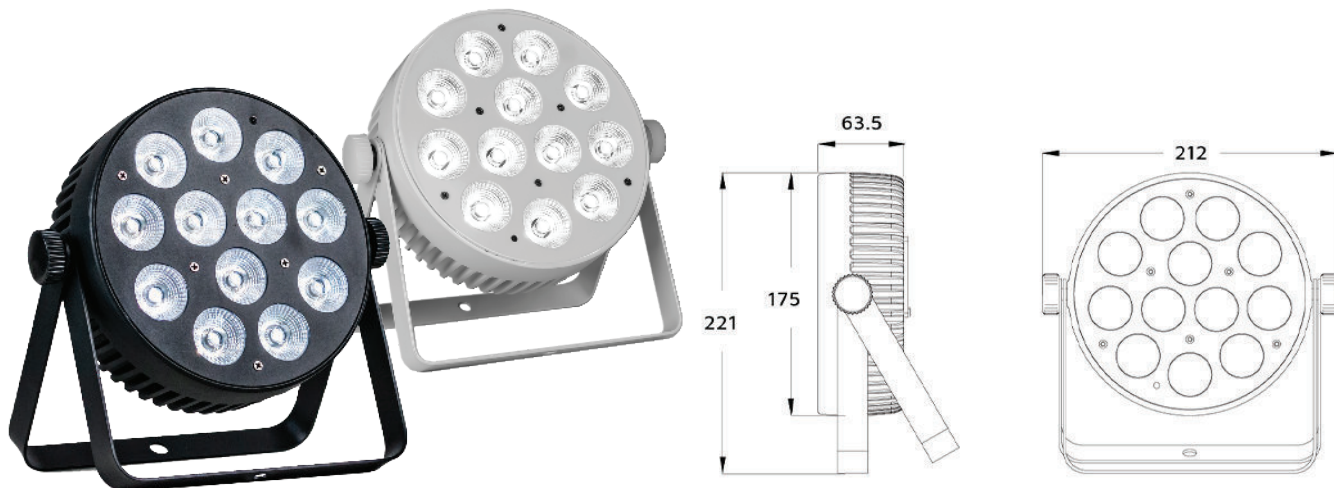

Photometrics	PAR12X12L / PAR12X12LW	PAR12X8L
Light Source:	12x 12W RGBW 6-in-1 LED	12x 8W RGBW 4-in-1 LED
Beam Angle:	40°	
Output:	2,580 lux @ 2.0 m full on	4,950 lux @ 2.0 m full on
PWM:	2,000 Hz	
Led lifespan:	50,000 hours	
Effects		
Dimming:	Dimming: 0~100%	
Strobe:	Strobe: 1 - 20 Hz	
Power		
Power consumption:	60W Max	60W Max
Input Voltage:	100~240V AC, 50/60Hz	
Connection:	IEC in/out	
Control		
Control Protocol:	DMX512	
DMX Channels:	6 / 11	4 / 9
Interface:	3-pin XLR in / out	
Operational Modes:	Modes: DMX, manual, auto, sound active, IR remote, master/slave	
Display	4-button and 4-digit LED control panel	
Housing		
Materials:	Die-cast aluminium, matte black or white finish	
Dimensions:	212 x 221 x 64 mm	
Cooling:	Fanless Cooling	
IP rating:	IP20	
Net Weight:	1.85 kg	
Optional accessories:	Carry bag PAR12LBAG	

Lux @ 40°	PAR12X12L / PAR12X12LW				
	1.0m	2.0m	3.0m	4.0m	5.0m
R	1,445	409	180	93	70
G	2,030	570	250	130	95
B	2,910	882	270	171	126
W	2,420	734	322	171	126
A	850	258	120	66	46
U	840	264	120	66	49
Full	8,550	2,580	1,123	543	423

Lux @ 40°	PAR12X8L				
	1.0m	2.0m	3.0m	4.0m	5.0m
R	3,300	850	370	230	140
G	3,700	1,055	480	290	180
B	5,500	1,626	705	415	260
W	4,200	1,265	570	335	222
Full	13,800	4,950	1,960	850	700



IR Remote
Included:



Optional Accessories

PAR12LBAG

Bag for 4pcs of
PAR12L Series

