

SS-8RC - Remote Satellite Station

The SS-8RC is an eight-scene RF remote-control DMX satellite station featuring a 50-foot wireless range, wireless charging, and up to six hours of battery life.

Satellite Wall Stations don't store or transmit DMX data; instead, they communicate with the Master Station, which sends the DMX data to your lights.

- Wireless Charging
- On/Off Button
- Charging Time: 1 Hour
- Battery Life: 6 Hours
- Range: 50-feet
- 8 Scenes With LED Indicators
- Connects To Master Wall Station Via Cat5
- Expandable To Additional Satellite Stations Via Cat5
- Bluetooth Protocol 4.0 Communication
- Remote Dimensions: 2.4" x 4.6" x 1"
- Weight: 0.3 lb.



SKU: SS-8RC



Magnetic Charging Plate



{Scan for product page}

Installation




Wall Stations come with a single gang low-voltage ring. They will not fit in a standard single gang box. Should you need to mount it in a metal-enclosed handy box, please use a Racal 670RAC box.



Power & Data

Satellite Stations receive both power and data through affordable, easy-to-use Ethernet cable.

Each Satellite Station also features a rear output, allowing multiple stations to be connected in series. Up to five Satellite Stations can be connected to one Master Station.

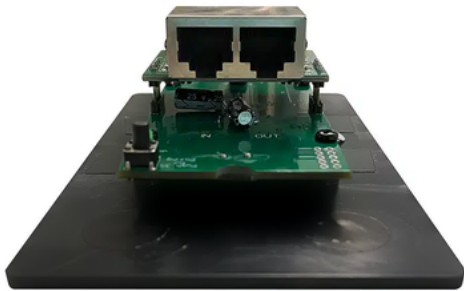

Pairing with the Master Station



If your SS-8RC does not connect automatically after being connected to the Master Station via Ethernet, press and hold the pairing button on the back of the unit for three seconds. The remote must remain attached to the magnetic base plate during pairing. This process can also be used to pair a replacement remote.