


Deluxe Master Desk Station | SMD-8 Desk

The SMD-8 Desk is a premium tabletop DMX Control Station designed for placement on any flat surface, providing access to eight programmable static scenes with built-in fade times without requiring permanent installation. Each unit supports up to five Satellite Stations and features two Satellite outputs, allowing control points to be routed in separate directions for more flexible system layouts.

The SMD-8 Desk can operate as a standalone DMX scene controller once programmed or integrate with a lighting console/computer when needed. A built-in control switch allows you to select whether the SMD-8 Desk or the connected console/computer serves as the active DMX control source. SMD-8 Desk Stations are static DMX scene recorders and cannot record sequences or chases.

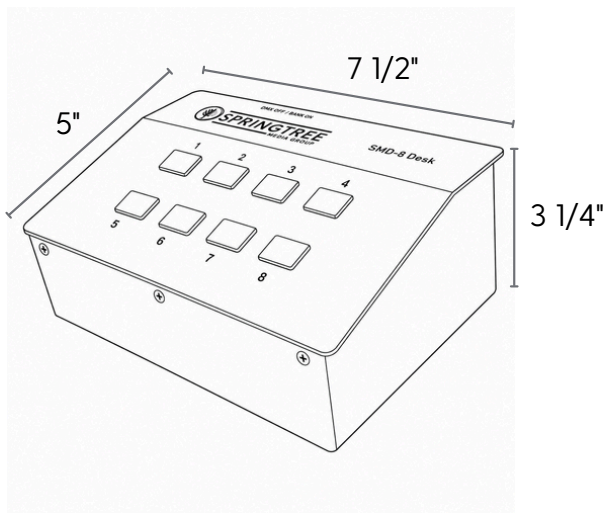

Specifications

- Power: AC110V 60Hz, 1A fuse
- Dimensions: 7 1/2" L x 5" W x 3 1/4" H
- Weight: 2.1 lb
- Finish: Black aluminum with UV-printing

Features

- 8-scene self-contained preset station
- Sits on any flat surface
- Static DMX scene recorder
- Built-in fade time presets
- Supports up to 5 satellite stations
- DMX-512 output
- Built-in control switch lets you quickly switch active DMX control between the SMD-8 and your console/computer
- Can work in tandem with a lighting console or computer
- 3-pin and 5-pin DMX inputs/outputs



[Scan for product page]

Connections & Switch




1. Ethernet Output to Satellite Station
2. Ethernet Output to Satellite Station
3. 5-Pin DMX Input
4. 3-Pin DMX Input
5. 5-Pin DMX Output
6. 3-Pin DMX Output
7. Power Socket (power cord included)
8. Control Switch (for switching active DMX control between the SMD-8 Desk and your console/computer)

Satellite Stations

Satellite Stations add control points around your facility. Up to 5 Satellite Stations can be used per SMD-8 Desk.

The SMD-8 Desk includes two Satellite outputs, making it easy to run Cat5 cable in two directions without an SS-Hub. Each Satellite Station also includes a rear output for connecting additional stations in series. The SMD-8 Desk is compatible with any Springtree Satellite Station.

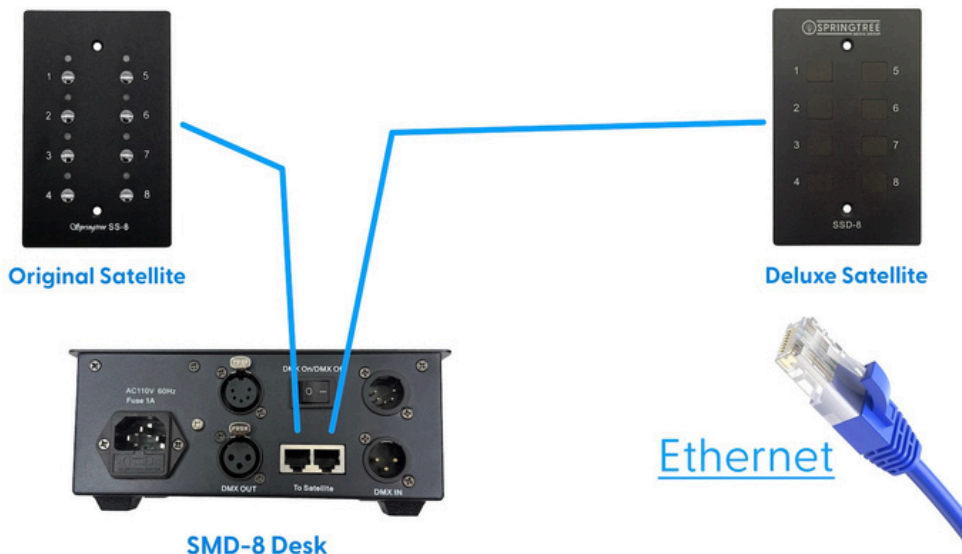

How To Program



1. Hold down buttons 1 and 8 to enter programming mode. The indicator light will turn red.
2. Set the desired lighting look on your lighting console.
3. Press the desired preset button, 1–8. The light will flash to confirm the scene has been stored.
4. Set a new look on your lighting console.
5. Press another unused preset button, or record over an existing scene by selecting that button.
6. Repeat until your desired scenes are stored. Up to 8 scenes can be recorded.
7. Hold down buttons 1 and 8 again to exit programming mode.